

Coming Spring 2023




Brisa & Brisa Distressed — Ultrafabrics

As the world's most outstanding breathable performance fabrics, Brisa and Brisa Distressed deliver unmatched comfort and durability. With a supple hand, softly textured aesthetic, and inherent ventilation system to promote air circulation, Brisa and Brisa Distressed are simply designed to do more.

Elements of Brisa — A curated palette that brings the beauty of the outdoors in.

Earth

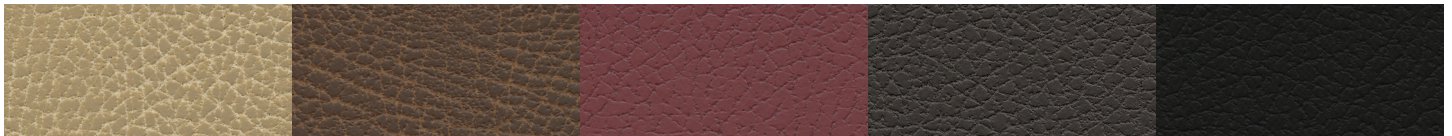

Brisa Distressed
Buckskin


Brisa Distressed
Bridle

Brisa
Beet Root

Brisa
Coffee Bean

Brisa
Black Onyx

Water

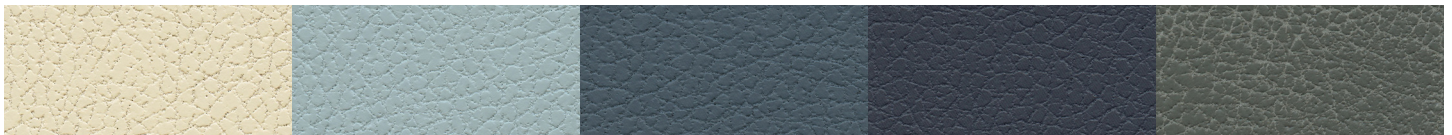

Brisa
Cream

Brisa
Sterling Blue²⁰²³

Brisa
Arctic²⁰²³

Brisa
Night Navy

Brisa Distressed
Iron

Wind



Brisa Distressed
Ranchwood²⁰²³


Brisa Distressed
Saddle

Brisa
Shiitake

Brisa
Dill²⁰²³

Brisa
Celery²⁰²³

- 01 Exceptional wear resistance – 300,000 double rubs
- 02 Climate control technology regulates temperature changes
- 03 Bleach cleanable (1:5 bleach/water solution)
- 04 Plush, luxurious feel that enhances and encourages comfort
- 05 No PFAS, PVC, plasticizers, or other toxic chemicals
- 06 Low VOC's support healthier indoor air quality
- 07 Indoor Advantage Gold Certified



Brisa & Brisa Distressed from Ultrafabrics

Applications

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Polyester, 35% Rayon Backing

Weight:

Approx. 8.9 oz. Per Square Yard
Approx. 300 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

8"V x 10.5"H / 203mm V x 267mm H
(Brisa Distressed)

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

16 Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Tensile Strength: BS EN ISO 1421

Air Permeability: ASTM D737

Sound Absorption: ASTM C423

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com

Ultrafabrics® and logo, and Brisa® are registered trademarks of Ultrafabrics Inc. Made in Japan.

